



TYP SR LADE-ENTLADE-UND SYMMETRIEWIDERSTAND




MODELS SR SYMMETRY RESISTORS AND/OR CAPACITORS DISCHARGE



SERIE SR RESISTORI DIVISORI DI TENSIONE E/O SCARICA DI CONDENSATORI

Test point	Temp. Rise at Rated Power 7SR-7SR/B	Temp. Rise at Rated Power 10SR-10SR/B
T1	$\Delta T = 26 \text{ }^\circ\text{C/W}$	$\Delta T = 21.5 \text{ }^\circ\text{C/W}$
T2	$\Delta T = 16 \text{ }^\circ\text{C/W}$	$\Delta T = 12.3 \text{ }^\circ\text{C/W}$
T3	$\Delta T = 15 \text{ }^\circ\text{C/W}$	$\Delta T = 11.5 \text{ }^\circ\text{C/W}$
T4	$\Delta T = 1.2 \text{ }^\circ\text{C/W}$	$\Delta T = 1 \text{ }^\circ\text{C/W}$

* Capacitor mounted - Depending on the shape and dimension of the capacitor connecting nut/cable system.

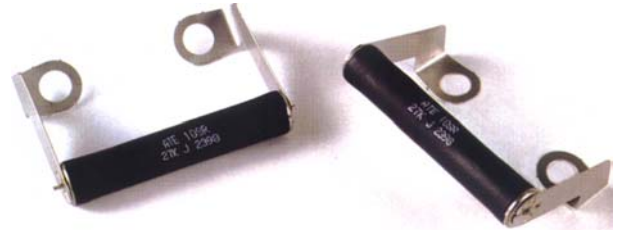

RoHS - compliant

Specifications Power Rating / T. coeff.		Dimension (mm)					Voltage	Dielectric strength	Ω	packing
P at 25°C T.C.R. ppm	Type H = 3% F = 1%	A ± 1	B \pm	C ± 1	D ± 1	E ± 1	V max.	Vac		Strip pcs.
	10 W / 100	7 SR H	22,2	40	15	21	9,5	685	1 000	0,1-47 k / 82 k
	7 SR/B H	22,2	40	10	16	9,5	685	1 000	0,1-47 k / 82 k	10
13 W / 100	10 SR	31,8	50	15	21	9,5	940	1 000	0,1-68 k / 120 k	10
	10 SR/B	31,8	50	10	16	9,5	940	1 000	0,1-68 k / 120 k	10

